


# RAME ROSSO

FILO RAME ROSSO - TERMINALI RAME ROSSO  
BARE COPPER WIRE - BARE COLOUR HEAD TERMINALS

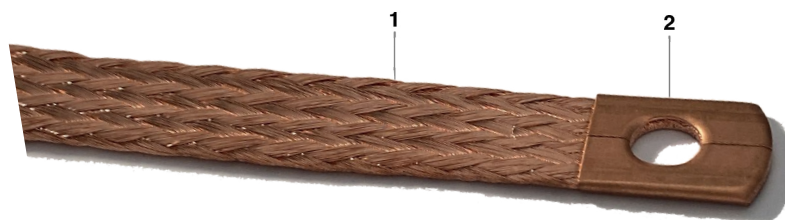

- 1 – Treccia rame rosso  
Bare copper braid
- 2 – Terminale rame rosso  
Bare colour head terminal

CODICE ARTICOLO	SEZIONE	DIAMETRO FILO	LARGHEZZA / LUNGHEZZA x SPESSORE TERMINALI	DIAMETRO FORI	LUNGHEZZA
ITEM CODE	CROSS SECTION	WIRE DIAMETER	WIDTH / LENGTH x HEAD TERMINALS THICKNESS	HOLES DIAMETER	LENGTH
	mm <sup>2</sup>	mm	mm	mm	mm
TM06 r1 L100 r7	6	0.1	11 / 13 x 2	7	100
TM06 r1 L150 r7	6	0.1	11 / 13 x 2	7	150
TM06 r1 L200 r7	6	0.1	11 / 13 x 2	7	200
TM10 r2 L100 r9	10	0.2	17 / 23 x 2	9	100
TM10 r2 L150 r9	10	0.2	17 / 23 x 2	9	150
TM10 r2 L200 r9	10	0.2	17 / 23 x 2	9	200
TM10 r2 L250 r9	10	0.2	17 / 23 x 2	9	250
TM10 r2 L300 r9	10	0.2	17 / 23 x 2	9	300
TM16 r2 L100 r9	16	0.2	17 / 23 x 2.5	9	100
TM16 r2 L150 r9	16	0.2	17 / 23 x 2.5	9	150
TM16 r2 L200 r9	16	0.2	17 / 23 x 2.5	9	200
TM16 r2 L250 r9	16	0.2	17 / 23 x 2.5	9	250
TM16 r2 L300 r9	16	0.2	17 / 23 x 2.5	9	300
TM25 r2 L100 r9	25	0.2	23 / 23 x 3.2	9	100
TM25 r2 L150 r9	25	0.2	23 / 23 x 3.2	9	150
TM25 r2 L200 r9	25	0.2	23 / 23 x 3.2	9	200
TM25 r2 L250 r9	25	0.2	23 / 23 x 3.2	9	250
TM25 r2 L300 r9	25	0.2	23 / 23 x 3.2	9	300
TM35 r2 L100 r9	35	0.2	23 / 23 x 3.4	9	100
TM35 r2 L150 r9	35	0.2	23 / 23 x 3.4	9	150
TM35 r2 L200 r9	35	0.2	23 / 23 x 3.4	9	200
TM35 r2 L250 r9	35	0.2	23 / 23 x 3.4	9	250
TM35 r2 L300 r9	35	0.2	23 / 23 x 3.4	9	300
TM50 r2 L100 r11	50	0.2	30 / 30 x 4.5	11	100
TM50 r2 L150 r11	50	0.2	30 / 30 x 4.5	11	150
TM50 r2 L200 r11	50	0.2	30 / 30 x 4.5	11	200
TM50 r2 L250 r11	50	0.2	30 / 30 x 4.5	11	250
TM50 r2 L300 r11	50	0.2	30 / 30 x 4.5	11	300
TM75 r2 L100 r11	75	0.2	30 / 30 x 5	11	100
TM75 r2 L150 r11	75	0.2	30 / 30 x 5	11	150
TM75 r2 L200 r11	75	0.2	30 / 30 x 5	11	200
TM75 r2 L250 r11	75	0.2	30 / 30 x 5	11	250
TM75 r2 L300 r11	75	0.2	30 / 30 x 5	11	300

## Informazioni

Lunghezze e diametri fori non presenti in tabella possono essere allestiti su richiesta del cliente.

Il filo elementare può essere indifferentemente, a richiesta, di diametro 0,10 mm o 0,20 mm.

Filo elementare e terminali possono combinarsi, indifferentemente, stag-nati e rossi.

## Information

Lengths and holes diameters not listed can be manufactured according to customer's request and drawings.

Single wire can be, by customer's request, of diameter 0,10 mm or 0,20 mm.

Single wire and head terminals can be mixed or not, by customer's request.

elexa cavi s.r.l.

isolet  
industriale s.r.l.

MORETRETREX  
INDUSTRIALE

Via alle Fabbriche 20 -  
10072 CASELLE T.se (TO)  
ITALY  
Tel. +390119913734  
Fax +390119975157  
P.IVA/CF IT 12101660012  
info@moretrex.it  
www.moretrex.it