


RAME STAGNATO

FILO RAME STAGNATO - TERMINALI RAME STAGNATO
TINNED COPPER WIRE - TINNED COLOUR HEAD TERMINALS

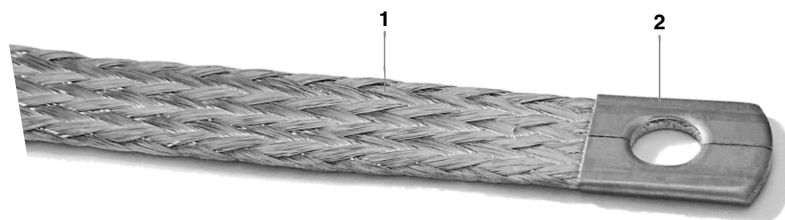

- 1 – Treccia rame stagnato
Tinned copper braid
2 – Terminale rame stagnato
Tinned colour head terminal

CODICE ARTICOLO	SEZIONE	DIAMETRO FILO	LARGHEZZA / LUNGHEZZA x SPESSORE TERMINALI	DIAMETRO FORI	LUNGHEZZA
ITEM CODE	CROSS SECTION	WIRE DIAMETER	WIDTH / LENGTH x HEAD TERMINALS THICKNESS	HOLES DIAMETER	LENGTH
	mm ²	mm	mm	mm	mm
TM06 s1 L100 s7	6	0.1	11 / 13 x 2	7	100
TM06 s1 L150 s7	6	0.1	11 / 13 x 2	7	150
TM06 s1 L200 s7	6	0.1	11 / 13 x 2	7	200
TM10 s2 L100 s9	10	0.2	17 / 23 x 2	9	100
TM10 s2 L150 s9	10	0.2	17 / 23 x 2	9	150
TM10 s2 L200 s9	10	0.2	17 / 23 x 2	9	200
TM10 s2 L250 s9	10	0.2	17 / 23 x 2	9	250
TM10 s2 L300 s9	10	0.2	17 / 23 x 2	9	300
TM16 s2 L100 s9	16	0.2	17 / 23 x 2.5	9	100
TM16 s2 L150 s9	16	0.2	17 / 23 x 2.5	9	150
TM16 s2 L200 s9	16	0.2	17 / 23 x 2.5	9	200
TM16 s2 L250 s9	16	0.2	17 / 23 x 2.5	9	250
TM16 s2 L300 s9	16	0.2	17 / 23 x 2.5	9	300
TM25 s2 L100 s9	25	0.2	23 / 23 x 3.2	9	100
TM25 s2 L150 s9	25	0.2	23 / 23 x 3.2	9	150
TM25 s2 L200 s9	25	0.2	23 / 23 x 3.2	9	200
TM25 s2 L250 s9	25	0.2	23 / 23 x 3.2	9	250
TM25 s2 L300 s9	25	0.2	23 / 23 x 3.2	9	300
TM35 s2 L100 s9	35	0.2	23 / 23 x 3.4	9	100
TM35 s2 L150 s9	35	0.2	23 / 23 x 3.4	9	150
TM35 s2 L200 s9	35	0.2	23 / 23 x 3.4	9	200
TM35 s2 L250 s9	35	0.2	23 / 23 x 3.4	9	250
TM35 s2 L300 s9	35	0.2	23 / 23 x 3.4	9	300
TM50 s2 L100 s11	50	0.2	30 / 30 x 4.5	11	100
TM50 s2 L150 s11	50	0.2	30 / 30 x 4.5	11	150
TM50 s2 L200 s11	50	0.2	30 / 30 x 4.5	11	200
TM50 s2 L250 s11	50	0.2	30 / 30 x 4.5	11	250
TM50 s2 L300 s11	50	0.2	30 / 30 x 4.5	11	300
TM75 s2 L100 s11	75	0.2	30 / 30 x 5	11	100
TM75 s2 L150 s11	75	0.2	30 / 30 x 5	11	150
TM75 s2 L200 s11	75	0.2	30 / 30 x 5	11	200
TM75 s2 L250 s11	75	0.2	30 / 30 x 5	11	250
TM75 s2 L300 s11	75	0.2	30 / 30 x 5	11	300

Informazioni

Lunghezze e diametri fori non presenti in tabella possono essere allestiti su richiesta del cliente.

Il filo elementare può essere indifferentemente, a richiesta, di diametro 0,10 mm o 0,20 mm.

Filo elementare e terminali possono combinarsi, indifferentemente, stagnati e rossi.

Information

Lengths and holes diameters not listed can be manufactured according to customer's request and drawings.

Single wire may be, by customer's request, of diameter 0,10 mm or 0,20 mm.

Single wire and head terminals can be mixed or not, by customer's request.

elexa cavi s.r.l.

isolet
industriale s.r.l.

MORETRET
INDUSTRIALE

Via alle Fabbriche 20 -
10072 CASELLE T.se (TO)
ITALY
Tel. +390119913734
Fax +390119975157
P.IVA/CF IT 12101660012
info@moretrex.it
www.moretrex.it