


# RAME STAGNATO

FILO RAME STAGNATO - TRECCIA TONDA  
TINNED COPPER WIRE - ROUND BRAID

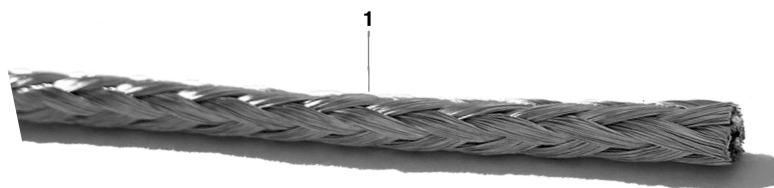

1 – Treccia rame stagnato  
Tinned copper braid

## FILO ELEMENTARE DIAMETRO 0.10 mm SINGLE WIRE DIAMETER 0.10 mm

CODICE ARTICOLO	SEZIONE	DIAMETRO	PESO
ITEM CODE	CROSS SECTION	DIAMETER	WEIGHT
	mm <sup>2</sup>	mm	kg/m
TT 001.00 s1	1.00	2	0.0090
TT 002.00 s1	2.00	2.5	0.0180
TT 002.50 s1	2.50	2.8	0.0225
TT 004.00 s1	4.00	3	0.0360
TT 006.00 s1	6.00	3.5	0.0540
TT 010.00 s1	10.0	4.5	0.0900
TT 016.00 s1	16.0	6	0.1440
TT 020.00 s1	20.0	7.5	0.1800
TT 025.00 s1	25.0	8	0.2250
TT 035.00 s1	35.0	9	0.3150
TT 040.00 s1	40.0	9.5	0.3600
TT 050.00 s1	50.0	10	0.4500
TT 060.00 s1	60.0	11	0.5400
TT 075.00 s1	75.0	12	0.6750
TT 090.00 s1	90.0	12.5	0.8100
TT 100.00 s1	100.0	13	0.9000

## FILO ELEMENTARE DIAMETRO 0.20 mm SINGLE WIRE DIAMETER 0.20 mm

CODICE ARTICOLO	SEZIONE	DIAMETRO	PESO
ITEM CODE	CROSS SECTION	DIAMETER	WEIGHT
	mm <sup>2</sup>	mm	kg/m
TT 004.00 s2	4.00	2.5	0.0360
TT 006.00 s2	6.00	3	0.0540
TT 010.00 s2	10.0	4.5	0.0900
TT 016.00 s2	16.0	6	0.1440
TT 020.00 s2	20.0	7	0.1800
TT 025.00 s2	25.0	8	0.2250
TT 030.00 s2	30.0	8.5	0.2700
TT 035.00 s2	35.0	9	0.3150
TT 040.00 s2	40.0	9.5	0.3600
TT 050.00 s2	50.0	10	0.4500
TT 060.00 s2	60.0	11	0.5400
TT 075.00 s2	75.0	13	0.6750
TT 090.00 s2	90.0	13.5	0.8100
TT 100.00 s2	100.0	14	0.9000

### Informazioni

Sezioni non presenti in tabella possono essere allestite su richiesta del cliente.

elexa cavi s.r.l.

isolet  
industriale s.r.l.

### Information

Sections not listed in the chart may be manufactured according to customer's request.

MORETRETREX  
INDUSTRIALE

Via alle Fabbriche 20 -  
10072 CASELLE T.se (TO)  
ITALY  
Tel. +390119913734  
Fax +390119975157  
P.IVA/CF IT 12101660012  
info@moretrex.it  
www.moretrex.it